
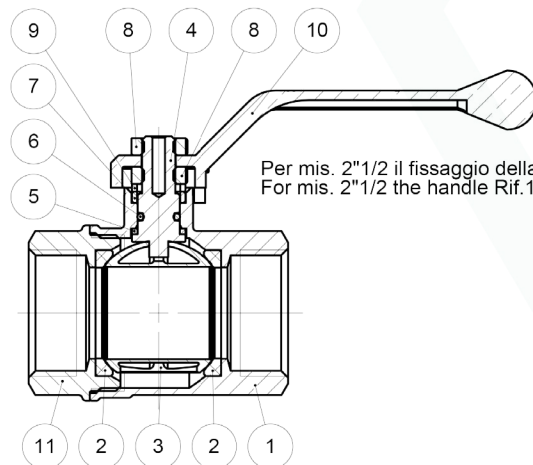
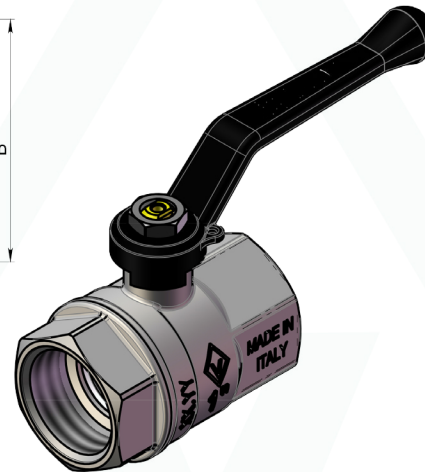


Scheda Tecnica *Technical Sheet*

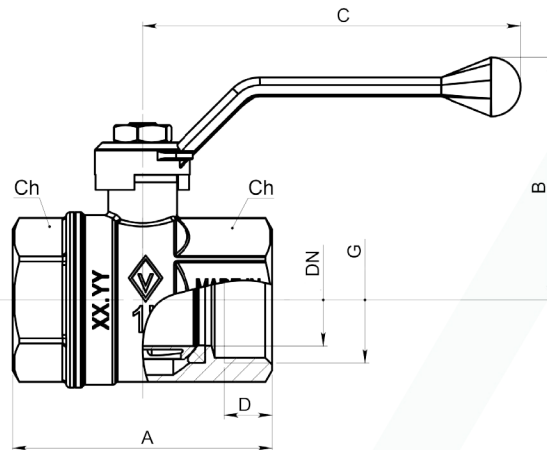

Per mis. 2"1/2 il fissaggio della leva Rif.11 avviene con vite
For mis. 2"1/2 the handle Rif.11 assembly is done with screw

DN	G	A	B	C	D	Ch	KV	PN
15	1/2"	48,5	49	87,5	9	25	16,3	50
20	3/4"	56	56	87,5	10,5	31	29,5	30
25	1"	68	63	99	12,5	38	43	30
32	1"1/4	80	68	131,5	14,5	47	89	20
40	1"1/2	94	75	131,5	15,5	54	230	20
50	2"	110	91	154	17,5	66	265	20
65	2"1/2	128	130	190	20	82	518	18

ART.0910

Forged brass ball valve, full port, F-F, with aluminium handle, Size from 1/2" to 2"1/2

SPECIFICATION

Series	0910
Thread ends	Female-Female: UNI ISO 228/1
Orifice	from 15 to 65 mm
Actuator	90° rotation with mechanical stop
Operator	Aluminium handle

APPLICATION

Assembly in rigid pipe system
Nominal pressure (PN) in bar: 18-50
KV: flowrate coefficient m³/h
Direction of flow: as desired
Temperature range: -20 °C / +120°C
Use: Water

N°	Descrizione	Description	Materials	Treatment	Q.ty
1	Corpo	Body	CW617N	Nickel-Plated	1
2	Guarnizione sede sfera	Ball Seals	PTFE		2
3	Sfera	Ball	CW617N	Ni+Cr	1
4	Perno	Stem	CW614N		1
5	Guarnizione inferiore	Lower seal	PTFE		1
6	O-Ring	O-Ring	NBR70sh		1
7	Guarnizione superiore	Upper seal	PTFE		1
8	Dado	Nut	STEEL	Zinc-Plated	2
9	Rondella	Brass ring	CW614N		1
10	Leva	Handle	ALUMINIUM	Printed	1
11	Manicotto	End Connection	CW617N	Nickel-Plated	1

N° Disegno / Drawing Nr.

0910

Misura / Size

1/2"-2"1/2



UFFICIO
TECNICO