


Scheda Tecnica *Technical Sheet*



DN	G	A	B	C	D	Ch	KV	PN
15	1/2"	47	47	87.5	10	25	11.2	40
20	3/4"	55	50	87.5	11	31	23.5	25
25	1"	65	62	99	13	38	32	25
32	1 1/4"	74	67	131.5	14	47	67.2	20
40	1 1/2"	83	72	131.5	15	54	112	20
50	2"	97	90	154	17	67	167.2	20

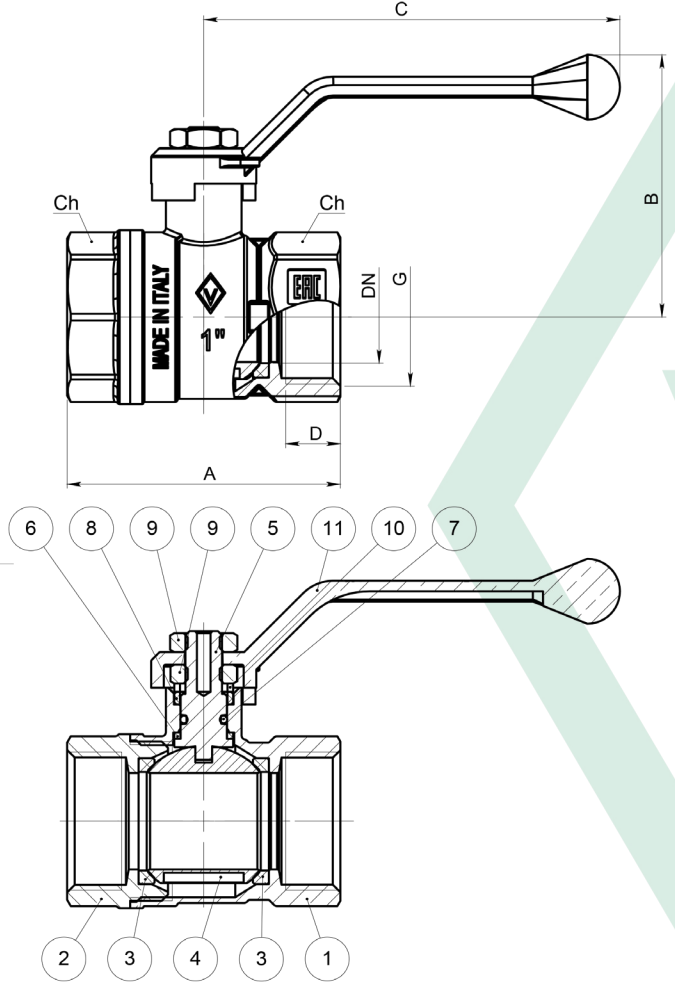

ART.0600	
Brass ball valve, standard port, F-F, with aluminium handle, Size from 1/2" to 2"	
SPECIFICATION	
Series	0600
Thread ends	Female-Female:ISO 228/1
Orifice	from 15 to 50 mm
Actuator	90° Rotation with mechanical stop
Operator	Aluminium Handle
APPLICATION	
Assembly in rigid pipe system	
Nominal pressure (PN) in bar: 20-40	
KV: flowrate coefficient m³/h	
Direction of flow: as desired	
Temperature range: -20 °C / +120°C	
Use: Water	

N°	Descrizione	Description	Materials	Treatment	Q.ty
1	Corpo	Body	CW617N	Nickel-Plated	1
2	Manicotto	End connection	CW617N	Nickel-Plated	1
3	Guarnizione	Ball seal	PTFE		2
4	Sfera	Ball	CW617N	Ni+Cr	1
5	Perno	Stem	CW614N		1
6	Guarnizione inferiore	Lower seal	PTFE		1
7	O-Ring	O-Ring	NBR70sh		1
8	Guarnizione superiore	Upper seal	PTFE		1
9	Dado	Nut	STEEL	Zinc-Plated	2
10	Rondella	Brass ring	CW614N		1
11	Leva	Handle	ALLUMINIUM	Printed	1

N° Disegno / Drawing Nr.	Misura / Size	BUGATTI® VALVOSANITARIA	UFFICIO TECNICO
0600	1/2"-2"		